





F316

- :

- MIG — — 625
- 1/2 60
- MAG —98% /2% —F316
- TIG —
- 625—
- F316—
- 1/4 56
- -20°C +500°C

- UNI EN ISO 3834-2

- 
- 

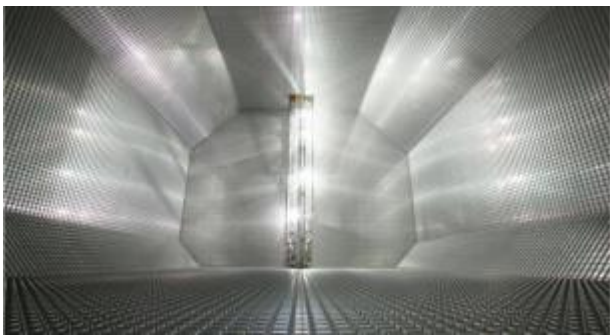

Hutchinson


-192°C 1150°C

20



Hutchinson

“ & ” “ & ”

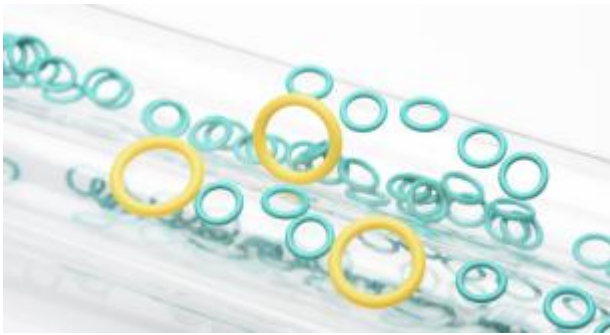

**O**

Hutchinson O

Page